

BIT-RATE BOUND DERIVATION FOR COMPRESSED TIME- DOMAIN FRONTHAUL

Chenguang Lu and Miguel Berg
Ericsson Research

Leonardo Ramalho and Aldebaro Klautau
UFPA

MOTIVATION



- › Fronthaul (FH) is one of the key enablers for C-RAN to further increase radio network capacity, and to reduce the radio cost and energy consumption
- › Main challenge for FH: too high capacity for transporting IQ samples as specified in CPRI (time domain FH)
- › FH compression and protocol stack split like PHY/MAC split are two main approaches to reduce FH bit rate
- › We focus on time-domain FH compression, which has the advantage being standard transparent
- › Main contribution of this work is the development of a lower bound for FH bit rate, showing the maximum achievable compression with the trade-off of performance (e.g. EVM)

REDUNDANCY ANALYSIS (EXAMPLE OF LTE)



› *Cyclic prefix*

- 6.67% CP overhead

› *Oversampling*

- Only 1200 out of 2048 subcarriers are used
- 30.13% overhead comparing to Nyquist sampling

› *Over-quantization*

- 15 bits per I/Q: > 80 dB SQNR
- 256-QAM requires ~30 dB SNR
- If 7 bits is sufficient, there is 53% overhead

› *Entropy coding*

- Lossless compression, like Huffman, approaches the entropy


DERIVATION OF LOWER BOUND



- › Lower bound can be found by taking out all redundancies identified with the consideration of radio performance (e.g. SNR)
- › Three steps:
 - Calculate SQNR for a given quantizer. We use the optimal uniform quantizer [1] for getting the highest SQNR given a number of bits
 - Assume normal distribution of the IQ samples, calculate the entropy values for different numbers of bits
 - Finally remove other redundancies, i.e. CP and over-sampling.


[1] Michael Bernhard, David Rörich, Thomas Handte, and Joachim Speidel, “Analytical and numerical studies of quantization effects in coherent optical OFDM transmission with 100 Gbit/s and beyond,” ITG-Fachtagung Photonische Netze, Leipzig, Germany, 7-8 May 2012, pp. 34-40.

DERIVED LOWER BOUND

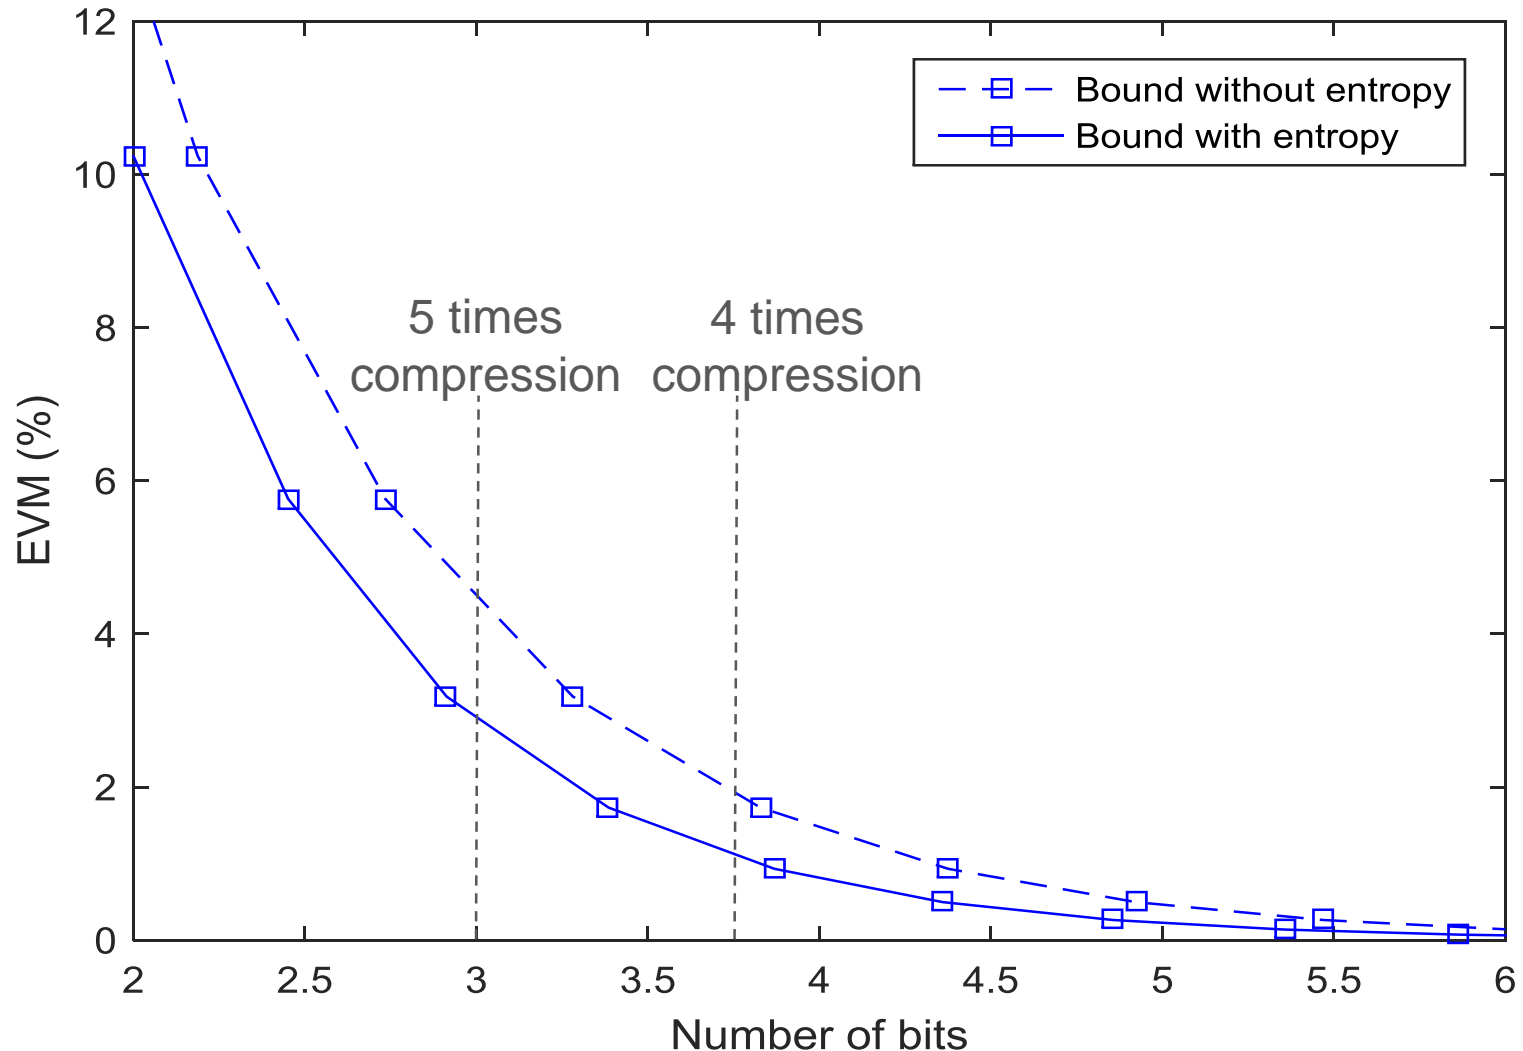


Note: 20 MHz LTE: 5 times -> 184 Mbps, 4 times -> 230 Mbps

SIMULATION DIAGRAM

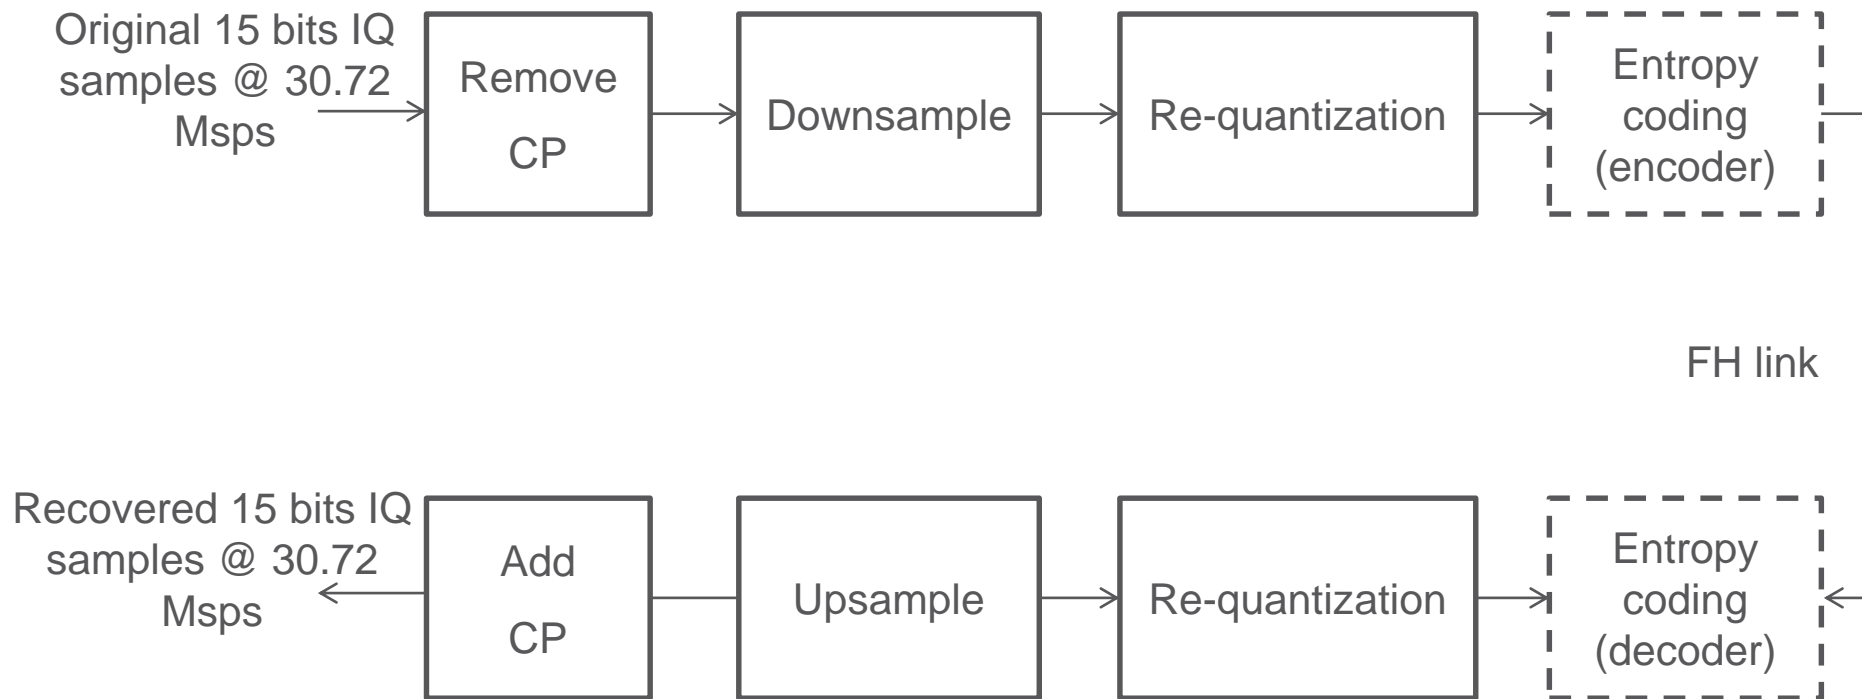

SIMULATION RESULTS

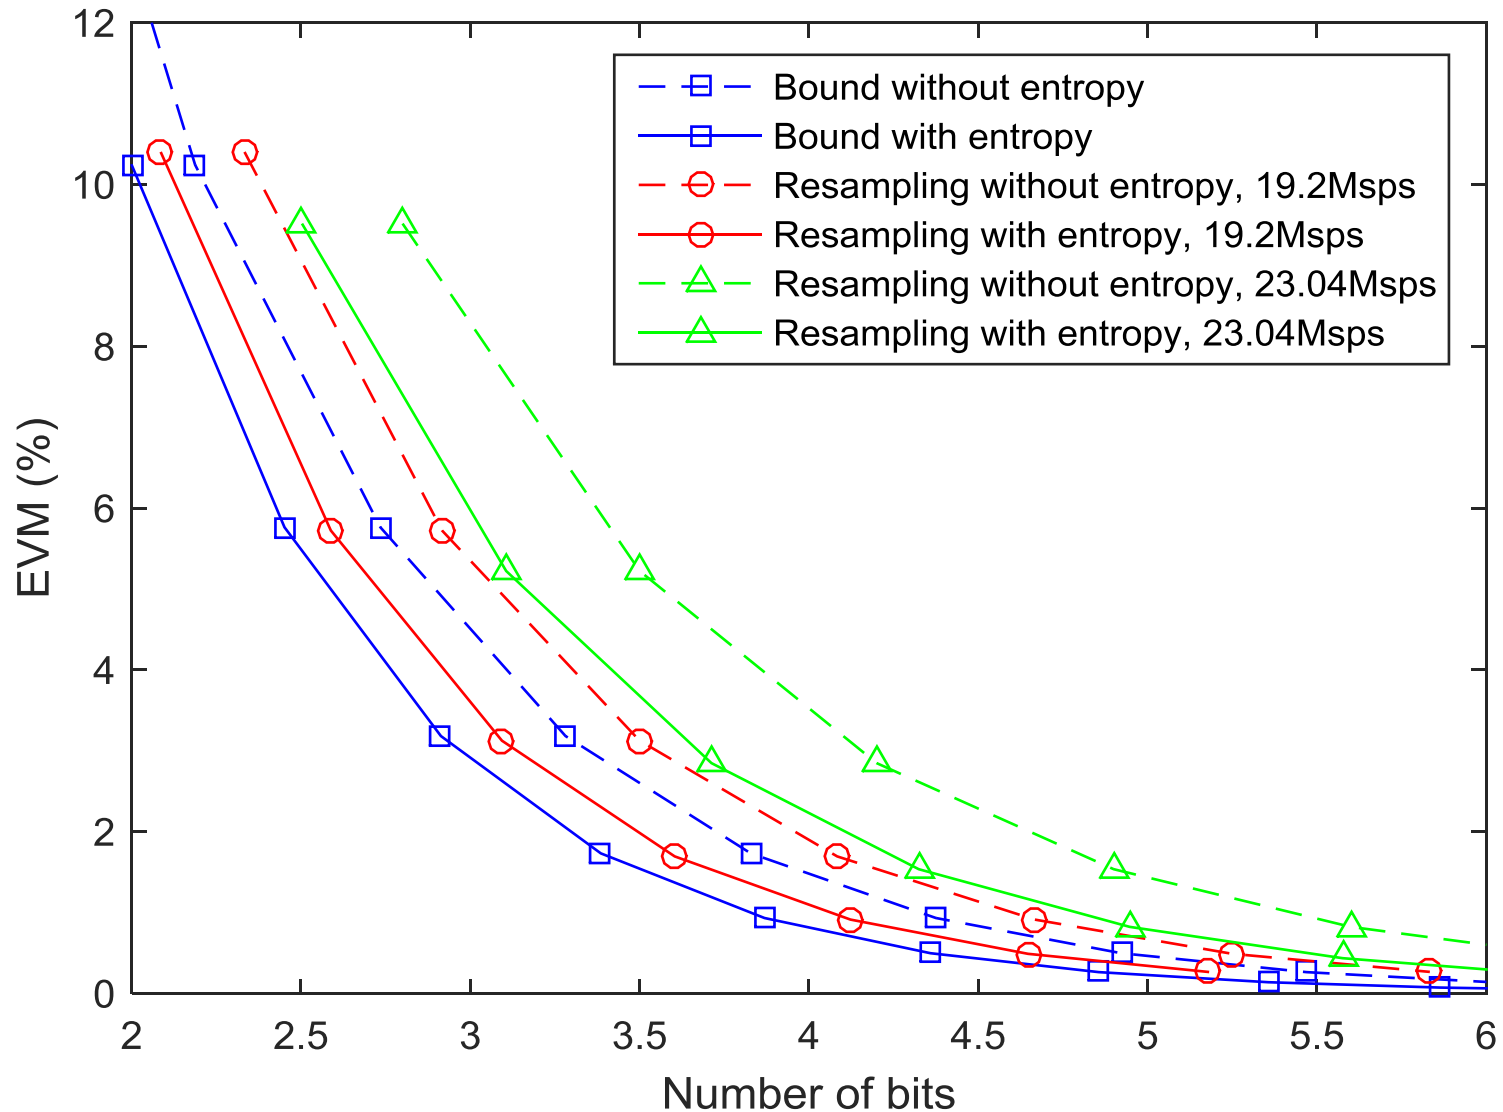

CONCLUSIONS



- › Large redundancy identified in time-domain FH, mainly in over-sampling and over-quantization
- › Entropy coding can further reduce the rate
- › 4-5 times compression is achievable without compromising the radio performance



ERICSSON